WEISER®
SECURITY & INNOVATION SINCE 1904™

KEY CONTROL™ DEADBOLT

FEATURING SMART KEY® Customized Security.

PROVIDING ONE-KEY CONTROL FOR MULTI-FAMILY APPLICATIONS

Key Control

- Top concealed cylinder provides one-key control for the property manager
- Lower exposed cylinder allows unique user keys for the tenant
- Re-key your user or control cylinder at any time in seconds
- Maintain key control throughout tenant and employee turnover

Increased Efficiency

- Re-key the lock without removing from the door
- Save time & money by re-keying yourself

Perfect for multi-family dwellings, student housing, assisted living & rental properties.

*Cylinder cap removed to show both cylinders

Easily access the Key Control cylinder: **(1)** Insert the SmartKey Tool into the slot at bottom of cylinder cover **(2)** Rotate cover clockwise to expose the Key Control cylinder. **(3)** Now you have access to the Key Control cylinder. Use tool to rotate counter-clockwise back to user's keyway when appropriate.

SmartKey Tool

t **604.419.4300** toll free **1.800.501.9471** | f **604.419.4385** toll free fax **1.800.663.7338** | **www.weiserlock.com**

THE SMART ALTERNATIVE TO MASTER KEYING

BOTH CYLINDERS FEATURE SMARTKEY® RE-KEY TECHNOLOGY

(1a) Concealed Key Control cylinder has a unique patented keyway to provide increased security. Simply rotate the cylinder cap to expose the cylinder for use.

(1b) User cylinder utilizes the SmartKey keyway and keys.

(1c) Gear assembly enables both cylinders to lock or retract the deadbolt latch.

CERTIFIED GRADE 2 ANSI/BHMA SECURITY

BUMPGUARD™

(2a) Patented side locking bar technology offers improved security by protecting against lock bumping, an attack on conventional pin & tumbler locks.

DRILL RESISTANCE

(2b) Cylinder uses two steel balls inserted into the front of the key face to resist attacks from drilling.

PICK RESISTANCE

(2c) Superior SmartKey withstands the highest level of UL pick testing, the UL 437, Par. 11.6.

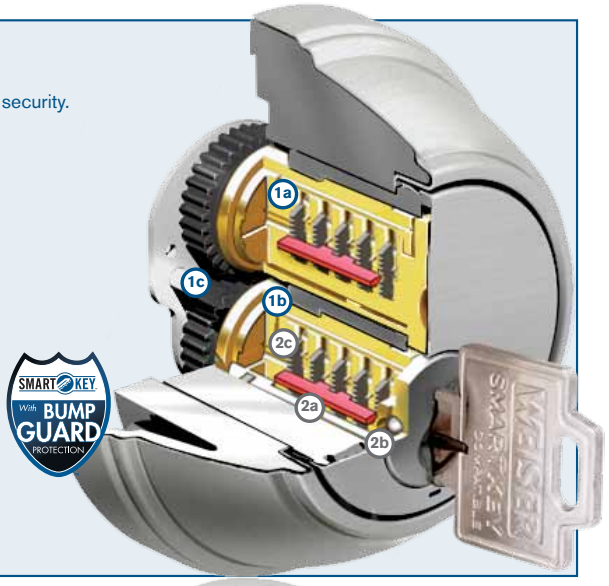

SPECIFICATIONS:

Standard Door Prep	Cross Bore 2-1/8". Edge Bore 1" Latch Face 1" x 2-1/4"
Door Thickness	1 3/8" – 1 3/4"
Cylinder	2 SmartKey® cylinders: 1 standard SmartKey for users, 1 unique patented keyway for 1-Key Control
Faceplate	1" x 2-1/4"
Strike	1-1/8" x 2-3/4"
Bolt	1" throw
ANSI/BHMA	A156.5 Grade 2
ADA	Interior turn piece meets 4.13.9 ADA
UL	Meets 3 hour fire rating for all UL functions when fronted latches used. ULRef#R10923. Meets 20 minute with drive-in latch.

FINISHES:



3 Polished Brass | 11P Venetian Bronze | 15 Satin Nickel | 26D Brushed Chrome

FUNCTIONS:



GCD 9571 Key Control Deadbolt
GCD 9571 UL Key Control Deadbolt
Deadbolt operated by key outside and thumb turn inside.

DIMENSIONS:

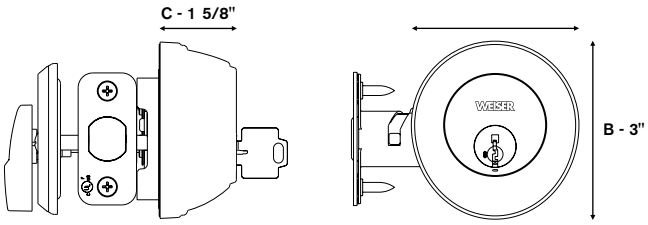

SMARTKEY® Customized Security.

EASILY RE-KEY IN 3 SIMPLE STEPS:

1 Insert functioning key & turn 1/4 turn clockwise.

2 Insert & remove the SmartKey learn tool. Remove functioning key.

3 Insert new key and turn 1/2 turn counter-clockwise. Your lock is now re-keyed!

You must have your functioning key & your SmartKey tool for the system to work.



SmartKey Tool + Functioning Key

t 604.419.4300 toll free 1.800.501.9471 | f 604.419.4385 toll free fax 1.800.663.7338 | www.weiserlock.com